

PORTABLE BLOWERS - BELT DRIVE

MOTOR: 2 speed, 120V, open ventilated, ball-bearing and permanently lubricated
BLADE: Aluminum, 4-paddle
SWITCH: Rocker
CORD: 8' long SJT type 3 conductor
GUARD: Spiral wire (front & rear) OSHA approved
WHEELS: 8" rubber
HOUSING: 20 gauge steel powder coated, black finish



MODEL #	SIZE	MOTOR HP	CFM MAX VELOCITY	MAX AMPS	WT (LBS)
CPB 36-B	36"	1/3	8,600	4.8	82
CPB 42-B	42"	1/2	12,000	4.3	93

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY



PORTABLE BLOWERS - DIRECT DRIVE

MOTOR: 2-speed, 120V, open ventilated, ball-bearing, and permanently lubricated, 3.6A Max
BLADE: Aluminum, 3-paddle; steel for 36" unit
SWITCH: Rocker or Rotary
CORD: 6' long SJT type 3 conductor; 10' on 36" model
GUARD: Spiral Wire (front & rear) OSHA approved
WHEELS: Rubber, diameter varies
HOUSING: 20 gauge steel powder coated, black finish




MODEL #	BLADE SIZE	STAND TYPE	CFM MAX VELOCITY	HP	SWITCH	WHEEL (Diameter)	WT (LBS)
CPBS 24-DHV	24"	SWIVEL	5,400	1/6	ROTARY	4"	38
CPBS 30-D	30"	SWIVEL	6,700	1/5	ROCKER	5"	60
CPB 30-D	30"	STATIONARY	6,700	1/5	ROCKER	5"	52
CPB 36-D	36"	STATIONARY	8,500	1/3	ROTARY	6"	70

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY



**STATIONARY
MODEL
(CPB 36-D)**

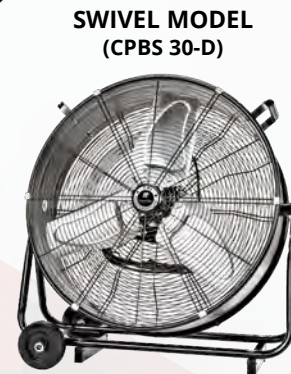

**SWIVEL MODEL
(CPBS 30-D)**

AIR CIRCULATORS - WALL MOUNT & PEDESTAL

Non-Oscillating & Oscillating Fan Heads


MOTOR: 3 Speed, 120V, 1 Phase, ball-bearing, open ventilated and permanently lubricated
SWITCH: Pull Chain
BLADE: Aluminum, 3-paddle with steel hub/spider assembly
CORD: 9' long SJT type 3-conductor with grounded plug
GUARD: OSHA approved, coated steel with retaining clips for easy access cleaning and maintenance
MOUNTS: Wall Mount - Steel bracket extends fan head 9" from a vertical surface | Pedestal Mount - Adjusts center of fan from 43" to 60"
FINISH: Steel, all black, semi-gloss powder coated finish



WALL MOUNT

ALL FAN COMPONENTS SHIPPED IN ONE UPS-ABLE CARTON

MODELS	BLADE SIZE	MOUNT TYPE	FAN TYPE	MOTOR HP	CFM MAX VELOCITY	AMPS (HIGH)
CACU 20-W	20"	Wall Mount	Non-Oscillating	1/10	5,400	1.4
CACU 24-W	24"			1/4	6,700	2.3
CACU 30-W	30"				5,400	2.4
CACU 24-WO	24"		Oscillating	1/4	6,700	1.5
CACU 30-WO	30"				5,400	2.0
CACU 20-P	20"	Pedestal Mount	Non-Oscillating	1/10	6,700	1.4
CACU 24-P	24"			1/4	5,400	2.3
CACU 30-P	30"				6,700	2.4
CACU 30-P-HD	30"			1/3	7,000	3.6
CACU 24-PO	24"		Oscillating	1/4	5,400	1.5
CACU 30-PO	30"				6,700	2.0
CACU 30-PO-HD	30"			1/3	7,000	3.6

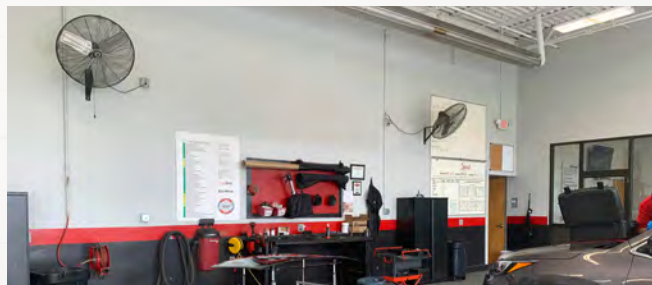

Meets Federal OSHA Requirements & 1-Year Warranty



PEDESTAL MOUNT



FLOOR FANS



MOTOR: 1/5 HP, 3 speed, sleeve-bearing, open ventilated, permanently lubricated
SWITCH: Rotary
FINISH: Steel, all black semi-gloss powder coated finish
CORD: 7' long, SJT type 3 conductor
GUARD: Coated steel with retaining clips



MODEL #	CFM			MAX AMPS	WT (LBS)
	HIGH	MEDIUM	LOW		
CF-12	1,050	875	750	0.6	10
CF-18	1,600	1,480	1,380	1.4	16
CF-20	1,725	1,600	1,480	1.9	17



DISTRIBUTED BY:

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY