

## PORTABLE BLOWERS - BELT DRIVE

**MOTOR:** 2-speed, 120V, open ventilated, ball-bearing and permanently lubricated  
**BLADE:** Aluminum, 4-paddle  
**SWITCH:** Rocker  
**CORD:** 8' long, SJT type 3 conductor  
**GUARD:** Spiral wire (front & rear) OSHA approved  
**WHEELS:** 8" rubber  
**HOUSING:** 20-gauge steel powder coated, black finish

| MODEL NUMBER | SIZE | MOTOR HP | CFM MAX VELOCITY | MAX AMPS | WT. (LBS) | 2024 MAP |
|--------------|------|----------|------------------|----------|-----------|----------|
| CPB 36-B     | 36"  | 1/3      | 8,600            | 4.20     | 82        | \$590.08 |
| CPB 42-B     | 42"  | 1/2      | 12,000           | 5.56     | 93        | \$705.28 |

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY



## PORTABLE BLOWERS - DIRECT DRIVE

**MOTOR:** 2-speed, 120V, open ventilated, ball-bearing and permanently lubricated, 3.6 Amp max  
**BLADE:** Aluminum, 3-paddle; steel for 36" unit  
**SWITCH:** Rocker or Rotary  
**CORD:** 6' long, SJT type 3 conductor; 10' on 36" model  
**GUARD:** Spiral wire (front & rear) OSHA approved  
**WHEELS:** Rubber, diameter varies  
**HOUSING:** 20-gauge steel powder coated, black finish

| MODEL NUMBER | SIZE | STAND TYPE | CFM MAX VELOCITY | HP  | SWITCH | MAX AMPS | WT. (LBS) | 2024 MAP |
|--------------|------|------------|------------------|-----|--------|----------|-----------|----------|
| CPBS 24-DHV  | 24"  | SWIVEL     | 5,400            | 1/6 | ROTARY | 2.35     | 38        | \$221.44 |
| CPBS 30-D    | 30"  | SWIVEL     | 6,700            | 1/5 | ROCKER | 2.73     | 60        | \$389.12 |
| CPB 30-D     | 30"  | STATIONARY | 6,700            | 1/5 | ROCKER | 2.73     | 52        | \$360.96 |
| CPB 36-D     | 36"  | STATIONARY | 8,500            | 1/3 | ROTARY | 3.97     | 70        | \$471.68 |

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY



## FLOOR FANS



**MOTOR:** 1/5 HP, 3 speed, sleeve-bearing, open ventilated, permanently lubricated  
**SWITCH:** Rotary  
**FINISH:** Steel, all black semi-gloss powder coated finish  
**CORD:** 7' long, SJT type 3 conductor  
**GUARD:** Coated steel with retaining clips

| MODEL NUMBER | CFM   |        |       | MAX AMPS | WT. (LBS) | 2024 MAP |
|--------------|-------|--------|-------|----------|-----------|----------|
|              | HIGH  | MEDIUM | LOW   |          |           |          |
| CF-12        | 1,050 | 875    | 750   | 0.48     | 10        | \$87.68  |
| CF-18        | 1,600 | 1,480  | 1,380 | 1.15     | 16        | \$108.80 |
| CF-20        | 1,725 | 1,600  | 1,480 | 1.21     | 18        | \$149.76 |

Meets Federal OSHA Requirements / 1 Year LIMITED WARRANTY





# AIR CIRCULATORS - WALL MOUNT

Oscillating & Non-Oscillating Fan Heads


- MOTOR: 3-speed, 120V, single phase, ball bearing motor open ventilated and permanently lubricated
- SWITCH: Pull chain
- BLADE: Aluminum, 3-paddle with steel hub/spider assembly
- CORD: 9' long cord SJT type 3-conductor with grounded plug
- GUARD: OSHA approved, coated steel with retaining clips for easy access cleaning and maintenance
- MOUNT: Steel bracket extends fan head 9" from a vertical surface
- FINISH: Steel, all black, semi-gloss powder coated finish



WALL MOUNT

## ALL FAN COMPONENTS SHIPPED IN ONE UPS-ABLE CARTON

| MODEL NUMBER | BLADE SIZE | FAN TYPE        | HP   | CFM MAX VELOCITY | AMPS (HIGH) | 2024 MAP |
|--------------|------------|-----------------|------|------------------|-------------|----------|
| CACU 20-W    | 20"        | Non-Oscillating | 1/12 | 5,400            | 1.38        | \$231.28 |
| CACU 24-W    | 24"        | Non-Oscillating | 1/8  | 6,700            | 1.75        | \$323.84 |
| CACU 30-W    | 30"        | Non-Oscillating | 1/6  | 5,400            | 1.93        | \$334.08 |
| CACU 24-WO   | 24"        | Oscillating     | 1/8  | 6,700            | 1.75        | \$382.08 |
| CACU 30-WO   | 30"        | Oscillating     | 1/6  | 5,400            | 1.93        | \$414.72 |

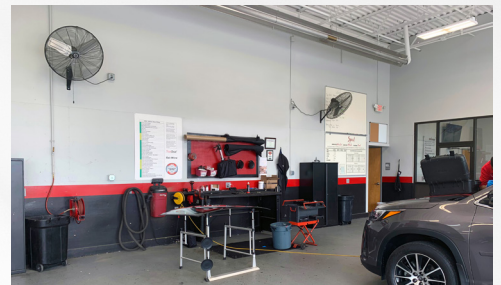

# AIR CIRCULATORS - PEDESTAL MOUNT

- MOTOR: 3-speed, 120V, single phase, ball bearing motor open ventilated and permanently lubricated
- SWITCH: Pull chain
- BLADE: Aluminum, 3-paddle with steel hub/spider assembly
- CORD: 9' long cord SJT type 3-conductor with grounded plug
- GUARD: OSHA approved, coated steel with retaining clips for easy access cleaning and maintenance
- MOUNT: Adjusts center of fan from 43" to 60"
- FINISH: Steel, all black, semi-gloss powder coated finish



PEDESTAL MOUNT



## ALL FAN COMPONENTS SHIPPED IN ONE UPS-ABLE CARTON

| MODEL NUMBER  | BLADE SIZE | FAN TYPE        | HP   | CFM MAX VELOCITY | AMPS (HIGH) | 2024 MAP |
|---------------|------------|-----------------|------|------------------|-------------|----------|
| CACU 20-P     | 20"        | Non-Oscillating | 1/12 | 6,700            | 1.38        | \$257.28 |
| CACU 24-P     | 24"        | Non-Oscillating | 1/8  | 5,400            | 1.75        | \$378.88 |
| CACU 30-P     | 30"        | Non-Oscillating | 1/6  | 6,700            | 1.93        | \$416.64 |
| CACU 30-P-HD  | 30"        | Non-Oscillating | 1/3  | 7,000            | 3.60        | \$485.76 |
| CACU 24-PO    | 24"        | Oscillating     | 1/8  | 5,400            | 1.75        | \$446.08 |
| CACU 30-PO    | 30"        | Oscillating     | 1/6  | 6,700            | 1.93        | \$468.48 |
| CACU 30-PO-HD | 30"        | Oscillating     | 1/4  | 7,000            | 3.60        | \$600.32 |

Meets federal OSHA requirements & 1-year warranty

