




MADE IN THE U.S.A.


CUSTOMER		DATE:	
PROJECT			
LOCATION			
ARCHITECT			
ENGINEER			
CONTRACTOR			
SUBMITTED BY			
APPROVED BY			
APPROVED BY			

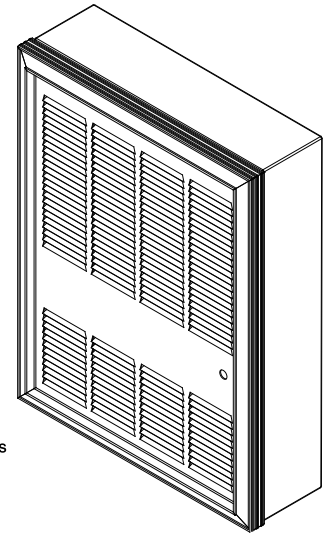

SUBMITTAL DATA SHEET


QTY	MODEL	TAG	WATTAGE	VOLTS	PHASE	AMPS	CFM	DISCONNECT	THERMOSTAT	OPTIONS

NOTES/SPECIAL INSTRUCTIONS:

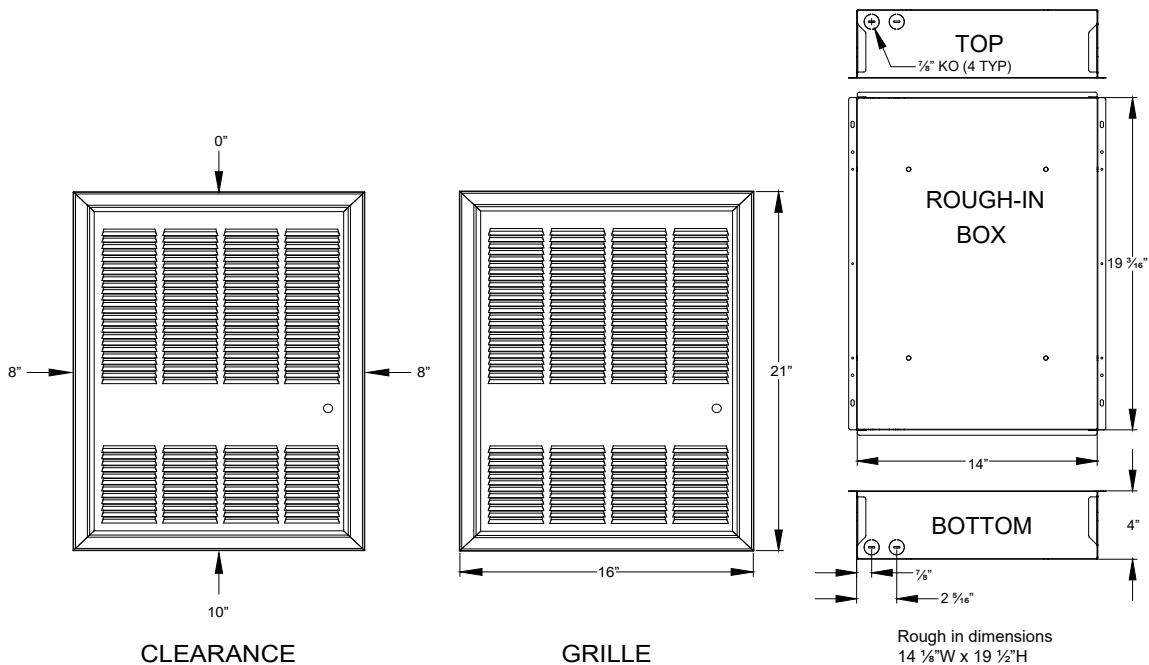

Features:

- Heavy duty 18-gauge steel construction (16-gauge grille optional) with aluminum front frame
- Powder coated paint finish
- Steel block fin element
- All units equipped with automatic over-heat limit protection
- Vane axial fan blade produces 175 CFM or 600 RPM
- Dual wattage and voltage units available for 208/240 volts
- Surface Mounting Frame (shown) available for non-recessed applications
- Factory installed Tamper-Proof Thermostats, Fan Delay, and Disconnect included
- Rough-in dimensions: 14 1/8" Wide x 19 1/2" High x 4" Deep
- Grill dimensions: 15 29/32" Wide x 20 27/32" High

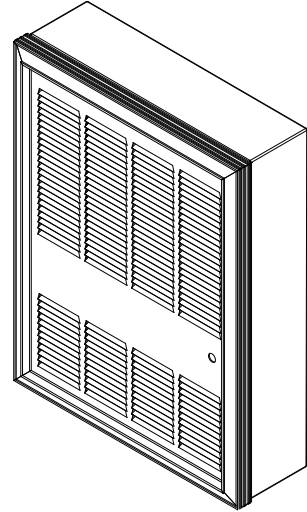

Product Specifications:

"Furnish and install Heavy-Duty Forced Air wall heaters, where specified. The heaters shall be constructed of a heavy 18 gauge steel housing with an extruded Aluminum frame. The rough-in dimensions are 14 1/8" Wide x 19 1/2" High x 4" Deep. The units shall be available in ratings from 750 to 4800 Watts at 240, 208, and 277 Volts. The heaters shall have a low-speed 600 RPM, 4-pole motor which drives a vane axial blower to deliver a quiet 175 CFM of down flow air. The heating element shall be of the sealed tubular type with large, parallel steel fins for quick heat transfer. Unit shall have as a standard, a thermal overload cut-off for added safety, fan delay switch and builtin tamper proof thermostat which shall be calibrated to provide a range of 0°F. to 110°F. and manual disconnect switch. Optional accessories shall include a surface and semi-recess mounting adapter. All heaters shall be listed by ETL. The heating element shall be supplied with a manufacturers 1-year limited warranty.