



HV SERIES

These high velocity blowers provide powerful airflow that is strong enough to stand up to any industrial setting, such as manufacturing facilities or warehouses. Additional mounting options are available.



VOLTAGE OPTIONS	PHASE	SPEED	MAX CFM	HP	FAN SIZES	MOUNTING & ACCESSORIES
120V, 208/240V, 277V, 480V	1 or 3	SINGLE	14,250	1/2 ; 1	18", 24", 30"	WALL/COLUMN, DOCK SWING ARM, STAND

* Bracket / mount sold separately



Features:

- ▶ Heavy-duty yoke mounting bracket design with 2" square steel tubing frame
- ▶ Aluminum 3-paddle blade system with steel hub and cast aluminum spider connections
- ▶ TEAO motor has a Class B rating, with automatic thermal protection & ball bearing design for harsh environments
- ▶ Front & rear spiral wound grills are OSHA approved & have a black powder coated finish
- ▶ Fan design provides (9) adjustment settings at 15° variations ; supplied mounting brackets allow for 120° pivot
- ▶ Fan ships fully assembled
- ▶ ETL listed & meets OSHA standards

Mounting Accessories:

*** Please contact customer service for accessory pricing.



HV-2 ; 22" reach
HV-3 ; 25" reach





PBX SERIES - BELT DRIVE

The PBX Series is one of our toughest and most durable portable industrial blowers. These units were recently redesigned and reconstructed to ensure the best performance possible. Fans are lightweight and easily moved, making them an in-house favorite when powerful airflow is needed within our manufacturing facility.



VOLTAGE OPTIONS	PHASE	SPEED	MAX CFM	HP	FAN SIZES	STYLE OPTIONS
120V, 120/240V, 240/480V	1 or 3	SINGLE	23,500	1, 1/2, 3/4	36", 42", 48"	STANDARD, SWIVEL, SUSPENDED, MINI



Features:

- ▶ Corrosion and dent-proof high density polyethylene housing for long-term durability
- ▶ 36" : 4-paddle aluminum blade
42" & 48" : 4-paddle steel blade
- ▶ 8" wheels (36" model) & 10" wheels (42" & 48" models) for easy transport
- ▶ Hazardous location models have explosion proof motors, metal housings, and external junction boxes rated for Class I, Group D and Class II, Groups E, F, & G
- ▶ Permanently lubricated ball bearing motor offers resistance against corrosion & abrasion
- ▶ Fan is offered with belt or direct drive motor; hazardous location models also available
- ▶ SJT-Type 3 conductor, 12' long cord on 120V, Phase 1 models / no cord on dual voltage models
- ▶ Fan ships fully assembled
- ▶ ETL listed for safety and meets OSHA standards



INDUSTRIAL CIRCULATORS

Circulators are versatile, durable and ideal for providing powerful directional airflow in a variety of industrial applications and environments like warehouses, material handling, high-shelf areas, loading docks, conveyor systems, workstations and more.



- ▶ Steel construction; silver/gray powder coated Steel motor housing painted black
- ▶ Aluminum 3-paddle blades with steel hub & cast aluminum spider connections
- ▶ Self-locking retaining clips to secure front/rear grills that meet OSHA safety requirements
- ▶ Pull-chain switch and 12' long SJT-Type cord with grounded plug
- ▶ Oscillating models rotate in a 90° arc, or can be locked in a fixed position
- ▶ Fully-assembled, ready for plug-&-play operation

Unassembled Fan Heads w/Mounts


VOLTAGE OPTIONS	PHASE	SPEEDS	MAX CFM	HP	WARRANTY	MOUNTING & STYLE
120V	1	2	7200	1/4	1-YEAR	UNASSEMBLED FAN HEAD ; WALL MOUNT or PEDESTAL MOUNT
MODEL	ACU 24-P	ACU 24-W	ACU 30-P	ACU 30-W		
	\$445.44	\$371.20	\$458.24	\$384.64		

Industrial Assembled 1/4 HP Circulators (FAN HEAD ONLY)

VOLTAGE OPTIONS	PHASE	SPEEDS	MAX CFM	HP	WARRANTY	MOUNTING / STYLE
120V	1	2	7200	1/4	1-YEAR	ASSEMBLED FAN HEAD ONLY STATIONARY ; NON-OSCILLATING
MODEL	ACH 24	ACH 30				* Mount sold separately
	\$346.88	\$357.76				

Industrial Assembled High Performance 1/3 HP Circulators (FAN HEAD ONLY)

VOLTAGE OPTIONS	PHASE	SPEEDS	MAX CFM	HP	WARRANTY	MOUNTING / STYLE
120V	1	2	7200	1/3	3-YEAR	ASSEMBLED FAN HEAD ONLY STATIONARY ; NON-OSCILLATING
MODEL	IHP 24-H	IHP 30-H				* Mount sold separately
	\$441.60	\$462.08				

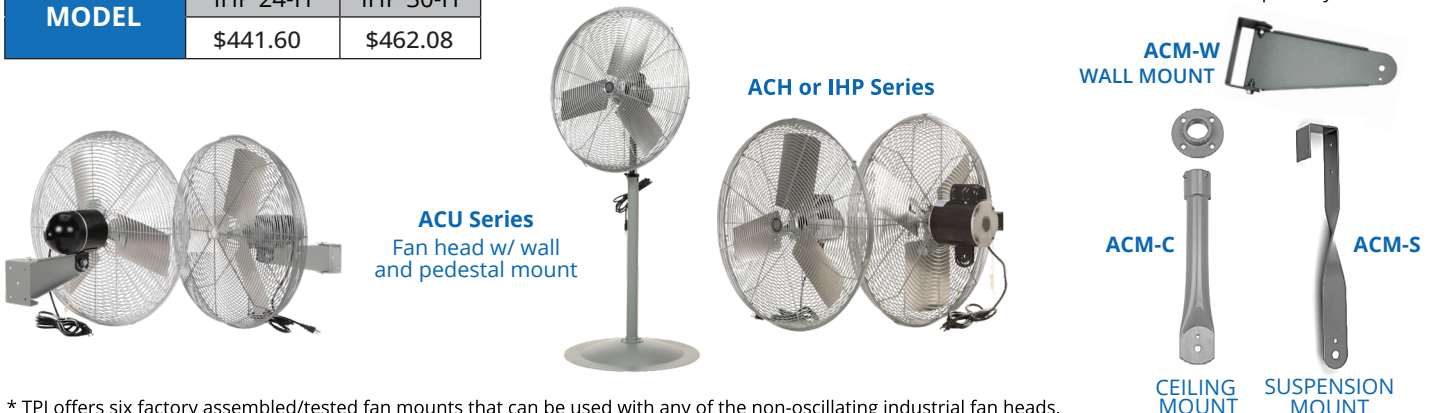

* TPI offers six factory assembled/tested fan mounts that can be used with any of the non-oscillating industrial fan heads.



HDH-36

Meet the HDH-36, our largest, most powerful, high-performance industrial air circulator. Generating up to 12,000 CFM's, the HDH-36 provides massive air movement to help you maintain a cool and comfortable work environment. It's steel construction and totally-enclosed motor guarantee durability and long-lasting use.



- ▶ Direct drive - single speed - totally enclosed air-over motor (TEAO) for harsh environments
- ▶ Aluminum 3-paddle blades - all steel construction for durability
- ▶ Fully-assembled fan head ; ready for plug & play operation



- ▶ Models include a pull-chain switch - SJT-Type 12' cord and grounded plug
- ▶ OSHA approved guards - ETL listed for safety
- ▶ Wall/column mount and mounting hardware included with fan

Assembled High Performance Industrial Circulator

VOLTAGE	PHASE	AMPS	SPEED	WATTS	MAX CFM	HP	WARRANTY	MOUNTING & STYLE
120V	1	5.2	SINGLE	624	12,000	1/3	3-YEAR	ASSEMBLED FAN HEAD ; WALL MOUNT INCLUDED

U-TE SERIES

The U-TE Series are durable, versatile and easy to install workstation fans. Fan head rotates 360° vertically and horizontally for uninterrupted powerful multi-directional airflow, making it perfect for cooling or expelling fumes. Fan can be mounted to walls, ceilings, work benches, machines or virtually any surface in your gym, office, warehouse, industrial or commercial space.



Industrial Workstation Fan w/Mounting Arm

VOLTAGE	PHASE	AMPS	SPEED	SIZES	MAX CFM	HP	WARRANTY	MOUNTING & STYLE
120V	1	1.1	3	12", 18"	2900	1/12	1-YEAR	ASSEMBLED FAN HEAD ; MOUNTING ARM INCLUDED
MODEL	U-12-TE-W	U-18-TE-W						
	\$195.84	\$225.92						

- ▶ Direct drive - totally enclosed motor - 3 speed settings to suit your space and temperature
- ▶ Aluminum 3-paddle blades - steel hub and cast aluminum spider connections
- ▶ Fully-assembled fan head ; ready for plug & play operation; mounting arm(s) included in carton

- ▶ Fan head rotates 360° vertically and horizontally
- ▶ 10' long SJT-Type grounded 3-conductor cordset with molded plug
- ▶ OSHA compliant wire front and rear guards ETL listed for safety

