


**MADE IN
THE U.S.A.**

OCH2 SERIES
Indoor/Outdoor Rated
Quartz Electric Infrared Heaters

CUSTOMER		DATE:	
PROJECT			
LOCATION			
ARCHITECT			
ENGINEER			
CONTRACTOR			
SUBMITTED BY			
APPROVED BY			
APPROVED BY			

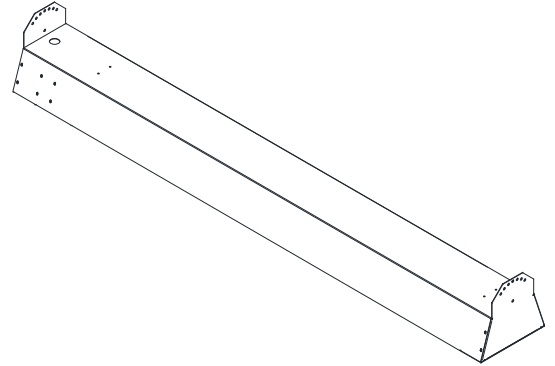


SUBMITTAL DATA SHEET										
QTY	MODEL	TAG	WATTAGE	VOLTS	PHASE	AMPS	TOTAL KW	ACCESSORIES	BRACKET	FINISH
NOTES/SPECIAL INSTRUCTIONS:										

Features:

- 2 Frosted Quartz Tube heating elements (included)
- Listed for suspended, totally exposed (outdoor) and indoor** spot heating applications
- Finish: High-temp brown powder coated finish or corrosion resistant stainless steel 20 gauge housing
- 60° Symmetric Heat Pattern
- Gold anodized Aluminum reflector and end caps
- 6" long lead wires for direct field connection
- Two 2' ft. long mounting chains and four S-Hooks included
- The OCH2-Series can be wall or ceiling mounted using the supplied mounting brackets which allow up to a 45° horizontal tilt adjustment
- Made in U.S.A.

Series:
 OCH2-55
 OCH2-66

Dimensions:
 Length: 55"; Width: 7.5"; Height: 7", Weight: 21 lbs.
 Length: 66"; Width: 7.5"; Height: 7", Weight: 25 lbs.

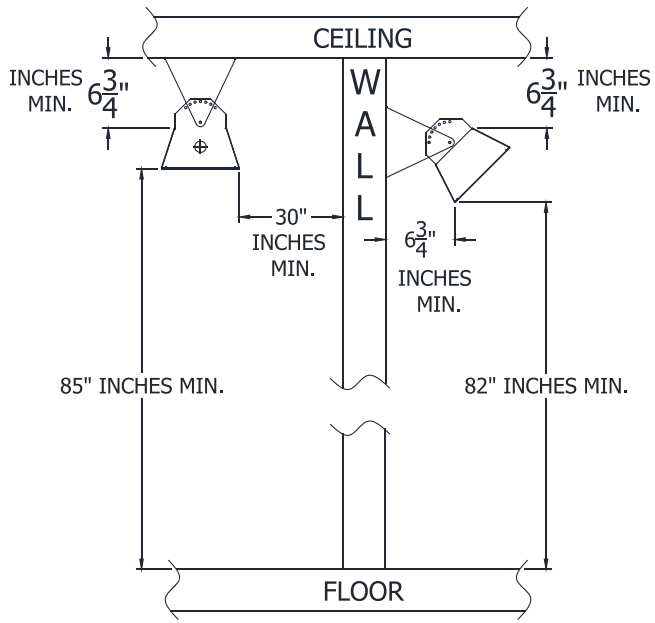

Product Models:

MFG CATALOG NUMBER	PAINTED BROWN	MFG CATALOG NUMBER	STAINLESS STEEL	WATTS	BTUs	VOLTS	AMPS	Qtz. Tube Repl. Element
	MFG MODEL NUMBER		MFG MODEL NUMBER					
04915502	OCH2-55-208V	04915902	OCH2-55-208V-SS	4000	13652	208	19.23	671-5062
04915602	OCH2-55-240V	04916002	OCH2-55-240V-SS			240	16.67	671-5063
04915702	OCH2-55-277V	04916102	OCH2-55-277V-SS			277	14.44	671-5064
04915802	*OCH2-55-480V	04916202	*OCH2-55-480V-SS			480	8.33	*671-5063
04916302	OCH2-66-208V	04916702	OCH2-66-208V-SS	6000	20478	208	28.85	671-5065
04916402	OCH2-66-240V	04916802	OCH2-66-240V-SS			240	25	671-5066
04916502	OCH2-66-277V	04916902	OCH2-66-277V-SS			277	21.66	671-5067
04916602	*OCH2-66-480V	04917002	*OCH2-66-480V-SS			480	12.5	*671-5066


Product Accessories:

MFG CATALOG NUMBER	MFG MODEL NUMBER	DESCRIPTION	FOR USE WITH
04917102	OCH2WG-55	Wire Guards	OCH2-55 Series Models
04917202	OCH2WG-66		OCH2-66 Series Models


Mounting:

- Chain, surface mount or use our vertical mounting bracket as shown below.
- In-Built surface mounting bracket allows for fixture adjustment up to a 45° horizontal tilt.
- As shown, the heater may be suspended at any horizontal angle desired.

Chain Mount: (Chain supplied)

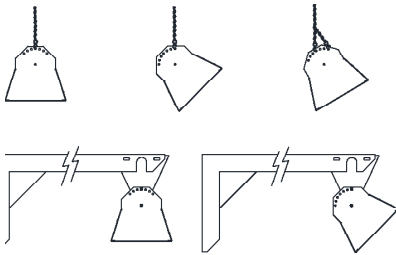

Reflector Pattern:



Optional Vertical Mounting Bracket: Model # VMB-41-SS

MOUNTING CLEARANCES	RECOMMENDED MOUNTING HEIGHT	
6-3/4" from ceiling; 30" from vertical surface 85" from face of heater to combustible surface 36" from another heater	OCH2-55	9'-11'
	OCH2-66	10'-12'

Note: All units must be mounted horizontally.